Hot rod car silhouette in blackwork

Sized for a 6 inch hoop (15 cm). The stitched design is about 4.9 × 4.9 in (12.4 × 12.4 cm).



Which color goes where. Each number is a stitch of the list.

Stitch in this order

Filled parts from the back of the picture forward, then lines.

1. **Long and short stitch**, 1 strand
   Roof, flames
2. **Satin stitch**, 2 strands
   Tail lamp, frame, radiator cap, lamp bracket, head lamp, exhaust pipes, tires, wheel spokes, hub caps, checkered floor, rays
3. **Back stitch**
   2 strands: radiator, rays
   1 strand: body squares, hood top, rear net
4. **Straight stitch**, 1 strand
   Body squares, rear net, fender trim
5. **Stem stitch**
   4 strands: radiator
   3 strands: fender
   2 or 3 strands: lamp lens
   2 strands: seams, flame edge, tail lamp, hub caps
6. **Split stitch**, 3 strands
   Windows, tires, red rings
7. **Whipped back stitch**, 3 strands
   Outline, ground line, ring

Floss

- **DMC 310 Black**
  Checkered floor, tires, rays, body squares, ring, rear net and roof and 18 more parts
- **DMC 321 Red**
  Flames and red rings, tail lamp (lighter)

How to read it

Floss is six strands. Cut 18 inches (45 cm), pull out the number given one at a time, and lay them together.

Inside a filled shape start with two or three tiny stitches, which the filling covers. Start a line with a small knot on the back. End each thread by running the needle under the backs of a few stitches.

Every stitch in pictures: flossfield.com/embroidery/stitches. The first time: flossfield.com/embroidery/guides/how-to-start.

Three ways to transfer the pattern

1. **Fabric you can see through**
   Tape page 2 to a sunny window or lay it on a light box, tape the fabric over it and trace the lines with a sharp pencil or a water-soluble pen.
2. **Fabric you cannot see through**
   Lay dressmaker's carbon paper colored side down on the fabric with page 2 on top, tape the layers and trace the lines firmly with a ballpoint pen.
3. **Iron-on: the lines stay**
   Go over the lines of page 3, the mirrored page, with an iron-on transfer pen, lay it ink side down on the fabric and press with a dry iron, as the pen's packet says.

Pages 2 and 3 are the pattern at actual size. Print them at 100% with scaling turned off. Then put the fabric in the hoop: inner ring under, drawing up, tight as a drum.

For your own stitching, gifts and handmade pieces you sell. Do not resell or share this PDF or copies of it.

Hot rod car silhouette in blackwork

6 inch hoop

Print at 100% and check the square below with a ruler. Fold the fabric in four: the folds meet the four ticks of the ring.

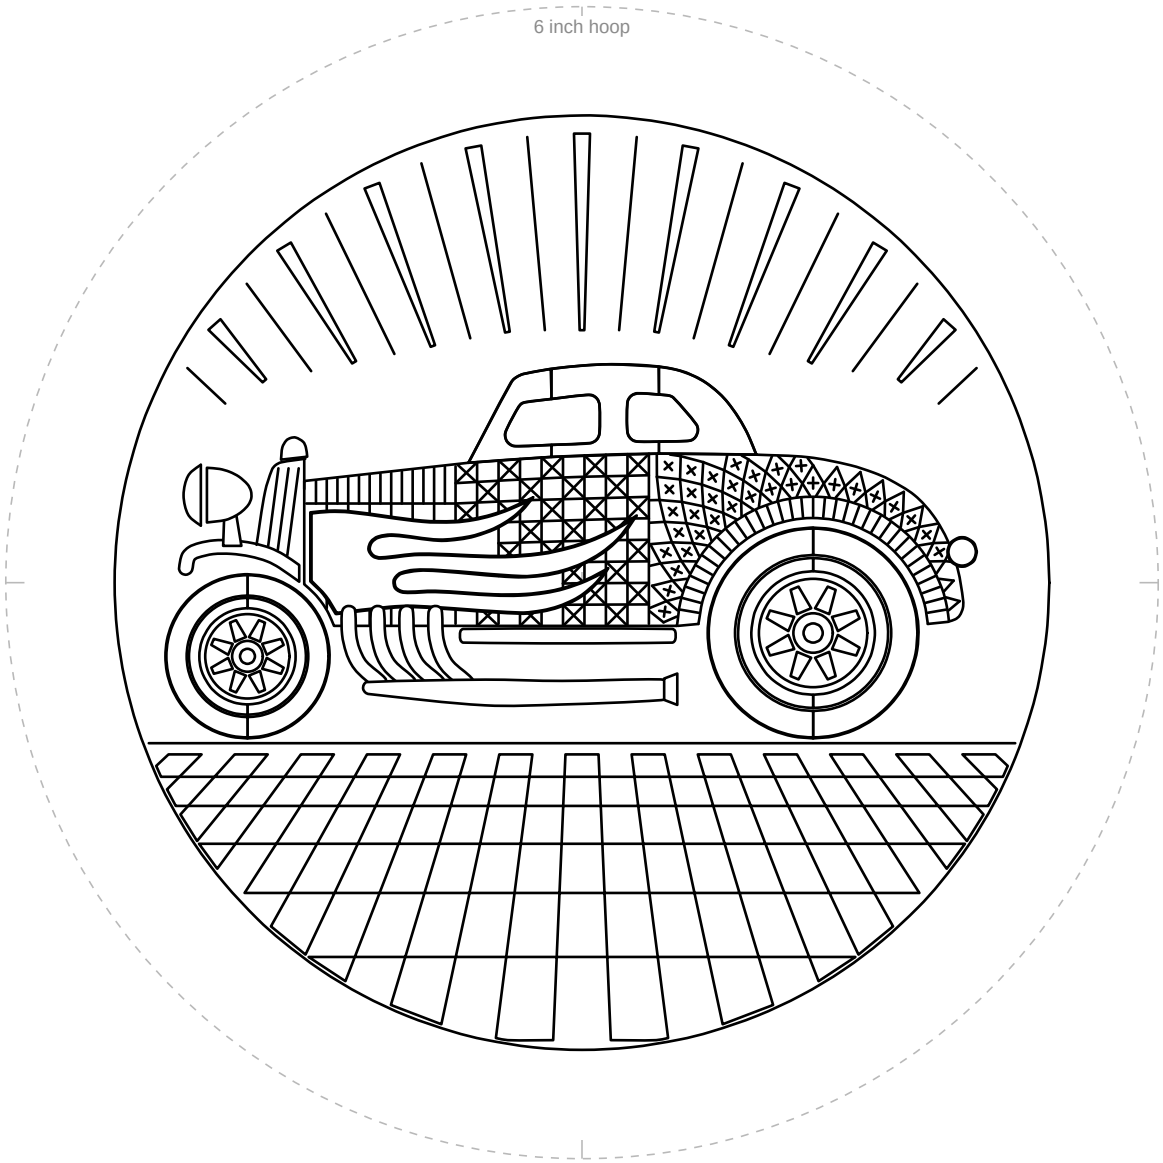

1 in
25.4 mm

Check square: 1 inch (25.4 mm) on each side.
If it measures anything else, print again at 100% with scaling off.

For your own stitching, gifts and handmade pieces you sell. Do not resell or share this PDF or copies of it.

Hot rod car silhouette in blackwork

6 inch hoop

Mirrored. Trace this page with an iron-on transfer pen or pencil, then press it ink side down on the fabric.

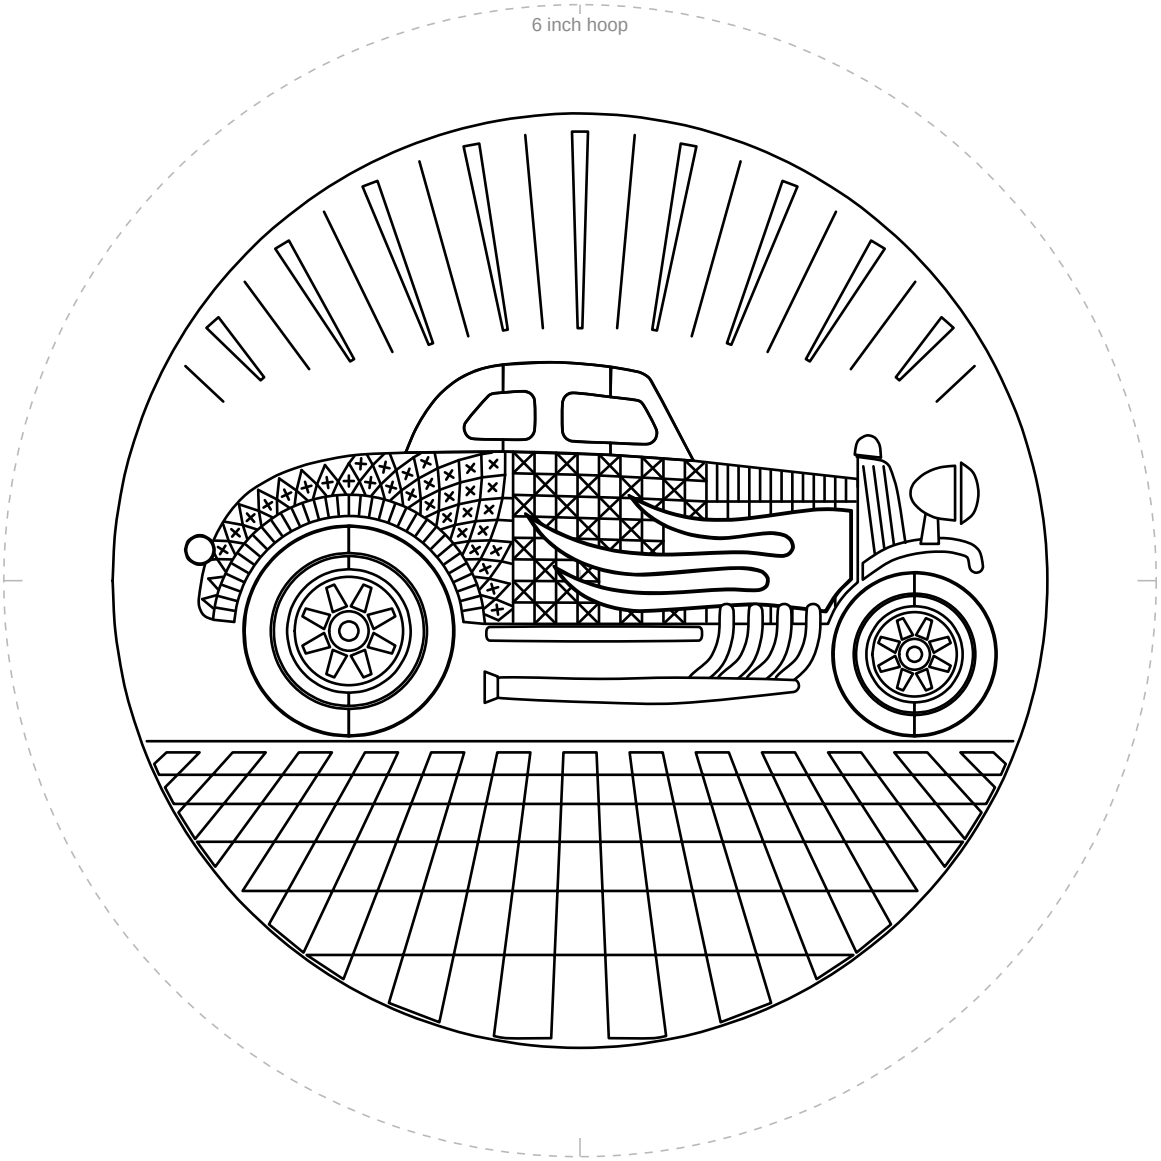

1 in
25.4 mm

Check square: 1 inch (25.4 mm) on each side.
If it measures anything else, print again at 100% with scaling off.

For your own stitching, gifts and handmade pieces you sell. Do not resell or share this PDF or copies of it.